

CLIMATE COMFORT | TEMPERATURE-CONTROLLED TRANSPORT

# MOBILE COMPRESSOR REFRIGERATED CONTAINERS



REFRIGERATED CONTAINERS



A WORLD OF COMFORT







## MOBILE COMPRESSOR REFRIGERATED CONTAINERS

### COMPRESSOR REFRIGERATED CONTAINERS FROM EBERSPÄCHER:

Our compressor refrigerated containers are the flexible, convenient solution for professional users who have to transport temperature-sensitive goods at constant temperatures in conventional vehicles, delivery vans, trucks, trailers and electric vans, while making sure they comply with regulations.

The advantages of mobile compressor refrigerated containers from Eberspächer are clear: purchasing and maintenance costs are significantly lower compared to complete cooling modifications. Furthermore, no additional cooling units or special vehicle equipment is required. Depending on the model, compressor refrigerated containers are simply secured in the vehicle and supplied with electricity. They constitute an independent "complete system" within the vehicle.

For cold-sensitive products, models with integrated heating function are also available. This permits temperature control from  $-35\text{ }^{\circ}\text{C}$  to  $+40\text{ }^{\circ}\text{C}$ , ensuring flexible distribution. All refrigerated containers are made from robust rotomolded polyethylene and are particularly easy to clean.

Some container models feature Light Autonomous Operation. This means they are equipped with an internal battery which is suitably sized for single day operation with no need for connection to the vehicle battery. This ensures that temperature-sensitive goods can be safely transported in electric vehicles.

### COMPRESSOR REFRIGERATED CONTAINERS ARE VERSATILE:

- Pharmaceutical – Transport of insulin, vaccines, etc.
- Medical – Clinical trials, blood, organ transport, etc.
- Laboratory – Water samples, DNA, etc.
- Food and Drink Industry – Samples, vending machine stockists, catering, etc.



All models come with a digital touchscreen controller. This allows easy setting of the required internal temperature, as well as control of the true internal temperature. In addition to Bluetooth and data storage for up to a year, there is an Android app for various settings and for creating reports on a number of parameters.



## THE RIGHT REFRIGERATED CONTAINER FOR EVERY APPLICATION

PRODUCT RANGE FROM 22 TO 1640 L VOLUME CAPACITY WITH TEMPERATURE CONTROL FROM -35 °C TO +40 °C

<p>NDN</p> 	<p>Cooling function up to 0 °C for fresh-product transport (-10 °C with 140 l version)</p>
<p>NDH</p>  	<p>Heating and cooling function between 0 °C and +30 °C for temperature-controlled transport (between -10 °C and +30 °C with 140 l version)</p>
<p>FDN</p>  	<p>Cooling/deep-freezing function to -21 °C or -24 °C for refrigerated or frozen transport</p>
<p>FDH</p>  	<p>Heating and cooling (deep-freezing) function between -24 °C and +40 °C for temperature-controlled transport (-21 °C and +30 °C with 140 l version)</p>
<p>XFDN</p> 	<p>Deep-freezing function to -35 °C for special transport</p>
<p>Light Au0</p> 	<p>Light Autonomous Operation – Autonomous battery operation possible</p>

## REFRIGERATED CONTAINERS FOR DELIVERY SERVICES










## 22 LITERS MOBILE REFRIGERATED CONTAINERS



### 22 LITERS – TOP LOADER

Technical designation	T0022 FDN	T0022 FDH
Temperature range	-24 °C  	+40 °C to -24 °C  
Product code	81 0000 00 0484	81 0000 00 0485
Voltage	12 / 24 VDC	12 / 24 VDC
Max. current draw, direct current	9 A at 12 V	9 A at 12 V
Wall foam insulation	65 - 70 mm PU*	65 - 70 mm PU*
Refrigerant	R134a	R134a
Weight	20.5 kg	21 kg
External dimensions (W x D x H)	375 x 585 x 480 mm	375 x 585 x 480 mm

\* PU = wall foam insulation with polyurethane rigid foam  
Standard model without battery packs. Equipped with one DC input. Container only available on special request.

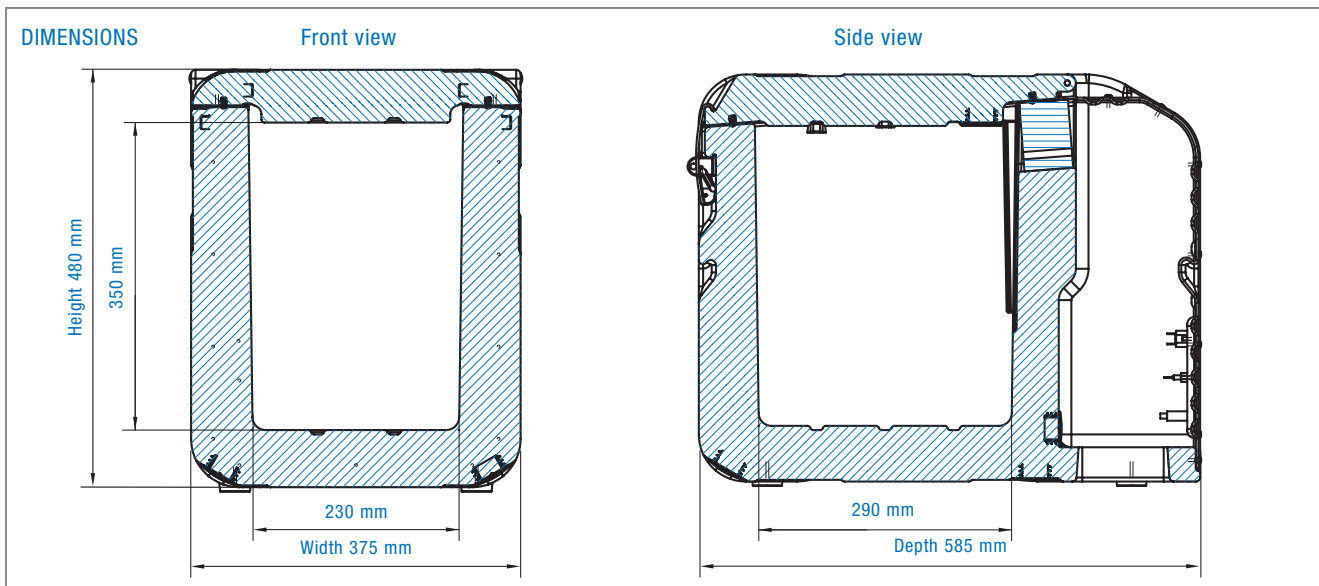







## 32 LITERS

### MOBILE REFRIGERATED CONTAINERS




#### 32 LITERS – TOP LOADER

Technical designation	T0032 FDN	T0032 FDH
Temperature range	-24 °C  	+40 °C to -24 °C  
Product code	81 0000 00 0486	81 0000 00 0487
Voltage	12 / 24 VDC	12 / 24 VDC
Max. current draw, direct current	9 A at 12 V	9 A at 12 V
Wall foam insulation	65 - 70 mm PU*	65 - 70 mm PU*
Refrigerant	R134a	R134a
Weight	22.5 kg	22.5 kg
External dimensions (W x D x H)	390 x 670 x 480 mm	390 x 670 x 480 mm

\* PU = wall foam insulation with polyurethane rigid foam

Standard model without battery packs. Equipped with one DC input. Container only available on special request.

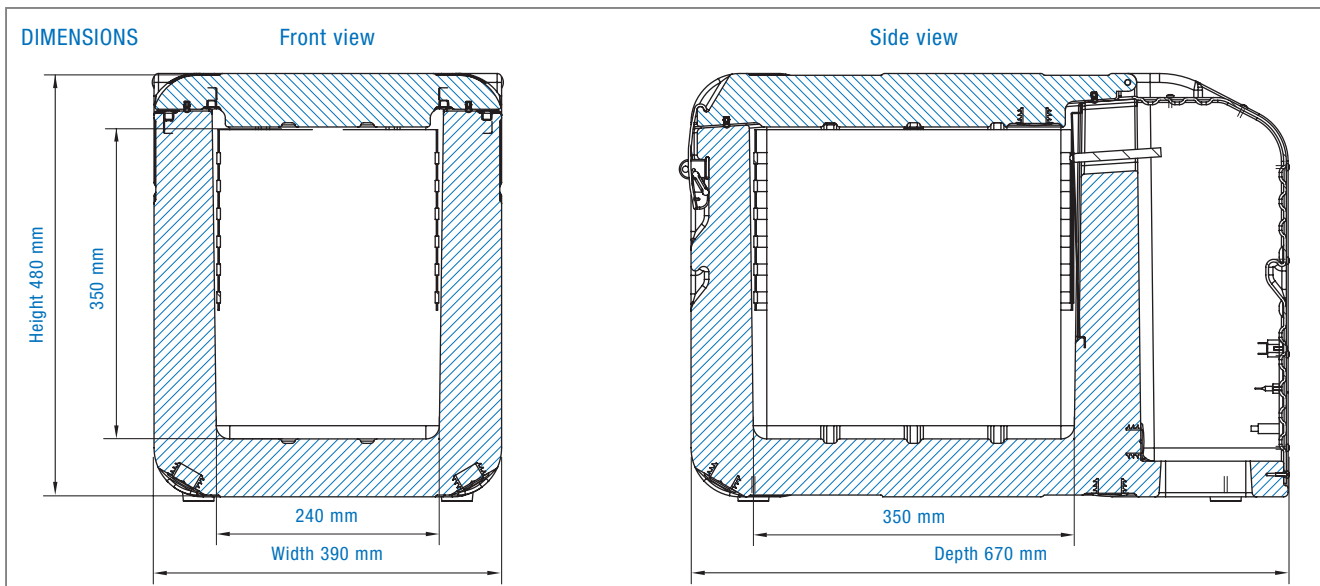








## 56 LITERS MOBILE REFRIGERATED CONTAINERS



### 56 LITERS – TOP LOADER

Technical designation	T0056 FDN	T0056 FDH
Temperature range	-24 °C  	+40 °C to -24 °C  
Product code	81 0000 00 0488	81 0000 00 0489
Voltage	12 / 24 VDC	12 / 24 VDC
Max. current draw, direct current	9 A at 12 V	9 A at 12 V
Wall foam insulation	70 mm PU*	70 mm PU*
Refrigerant	R134a	R134a
Weight	33 kg	33 kg
External dimensions (W x D x H)	495 x 800 x 500 mm	495 x 800 x 500 mm

\* PU = wall foam insulation with polyurethane rigid foam  
Standard model without battery packs. Equipped with two DC inputs.  
Accessories depend on the model.

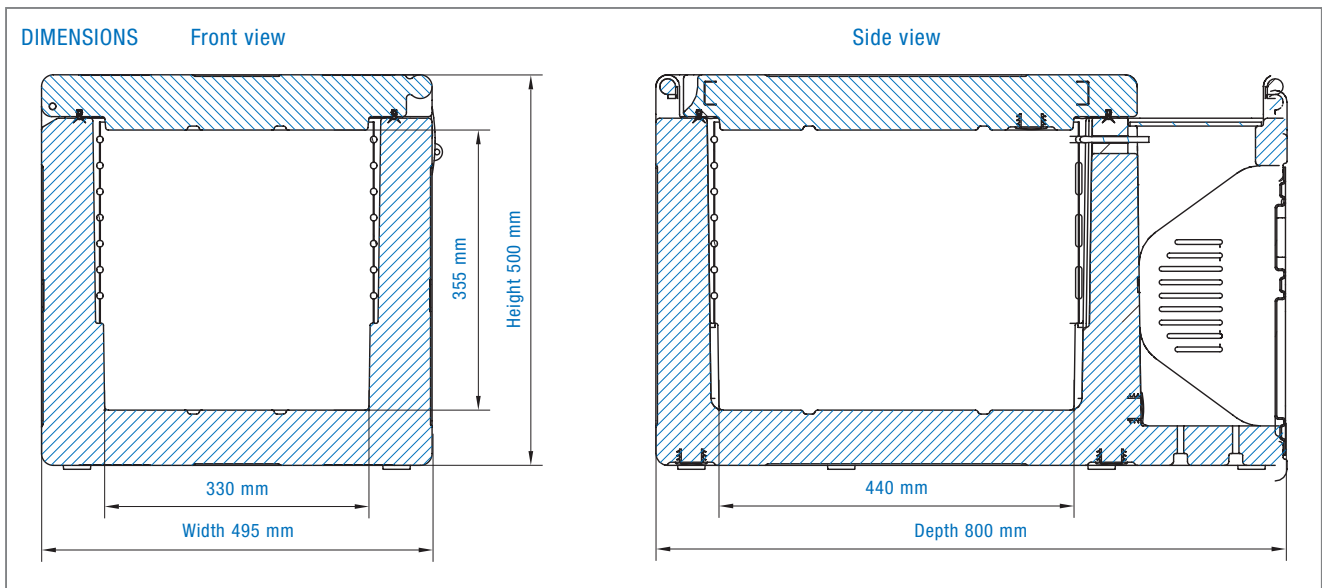










## 82 LITERS MOBILE REFRIGERATED CONTAINERS



### 82 LITERS – TOP LOADER

Technical designation	T0082 FDN	T0082 FDH	T0082 XFDN
Temperature range	-24 °C  	+40 °C to -24 °C  	-35 °C 
Product code	81 0000 00 0490	81 0000 00 0491	81 0000 00 0492
Voltage	12 / 24 VDC	12 / 24 VDC	12 VDC
Max. current draw, direct current	9 A at 12 V	9 A at 12 V	25 A at 12 V
Wall foam insulation	80 mm PU*	80 mm PU*	80 mm PU*
Refrigerant	R134a	R134a	R404a
Weight	35 kg	35 kg	40 kg
External dimensions (W x D x H)	560 x 940 x 551 mm	560 x 940 x 551 mm	560 x 940 x 551 mm

\* PU = wall foam insulation with polyurethane rigid foam ( $K < 0.32 \text{ W/(m}^2\text{K)}$ )  
Standard model without battery packs. Equipped with two DC inputs.  
Accessories depend on the model.

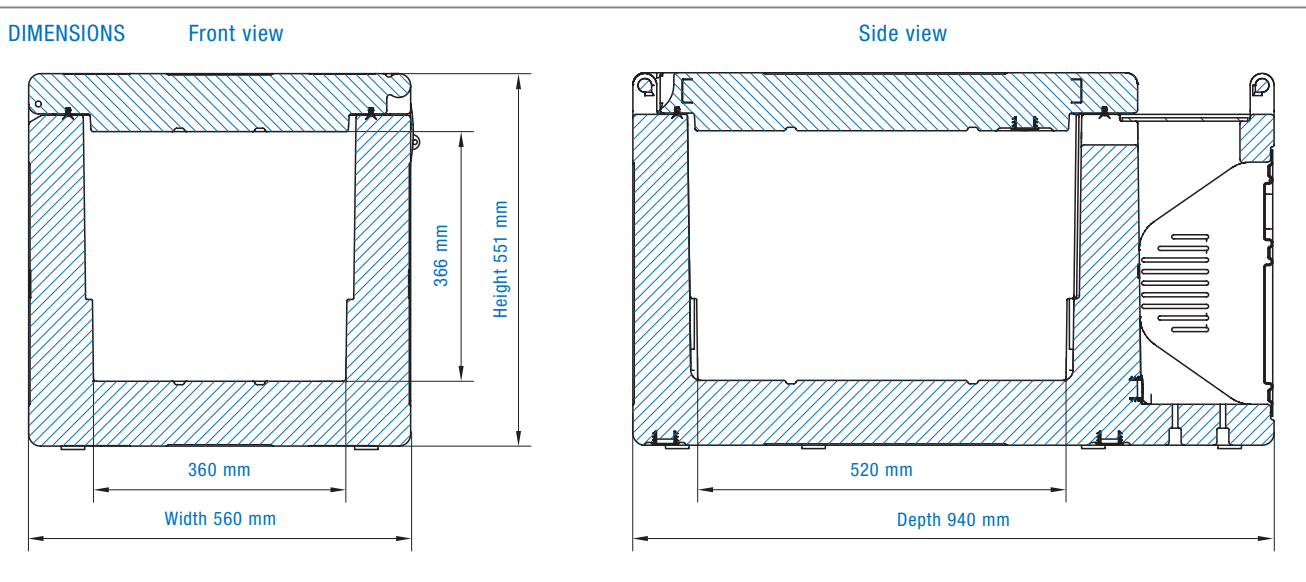










## 140 LITERS MOBILE REFRIGERATED CONTAINERS



### 140 LITERS – FRONT LOADER

Technical designation	F0140 NDN	F0140 FDN	F0140 NDH	F0140 FDH
Temperature range	-10 °C 	-21 °C 	+30 °C to -10 °C  	+30 °C to -21 °C  
Product code	81 0000 00 0493	81 0000 00 0495	81 0000 00 0494	81 0000 00 0496
Voltage	12 / 24 VDC	12 / 24 VDC	12 / 24 VDC	12 / 24 VDC
Max. current draw, direct current	10 A at 12 V	18 A at 12 V	10 A at 12 V	18 A at 12 V
Wall foam insulation	80 - 100 mm PU*	80 - 100 mm PU*	80 - 100 mm PU*	80 - 100 mm PU*
Refrigerant	R134a	R134a	R134a	R134a
Weight	52 kg	55 kg	54 kg	57 kg
External dimensions (W x D x H)	620 x 1,000 x 710 mm	620 x 1,000 x 710 mm	620 x 1,000 x 710 mm	620 x 1,000 x 710 mm

\* PU = wall foam insulation with polyurethane rigid foam ( $K < 0.35 \text{ W/(m}^2\text{K)}$ )  
Standard model without battery packs. Equipped with two DC inputs.  
Accessories depend on the model.

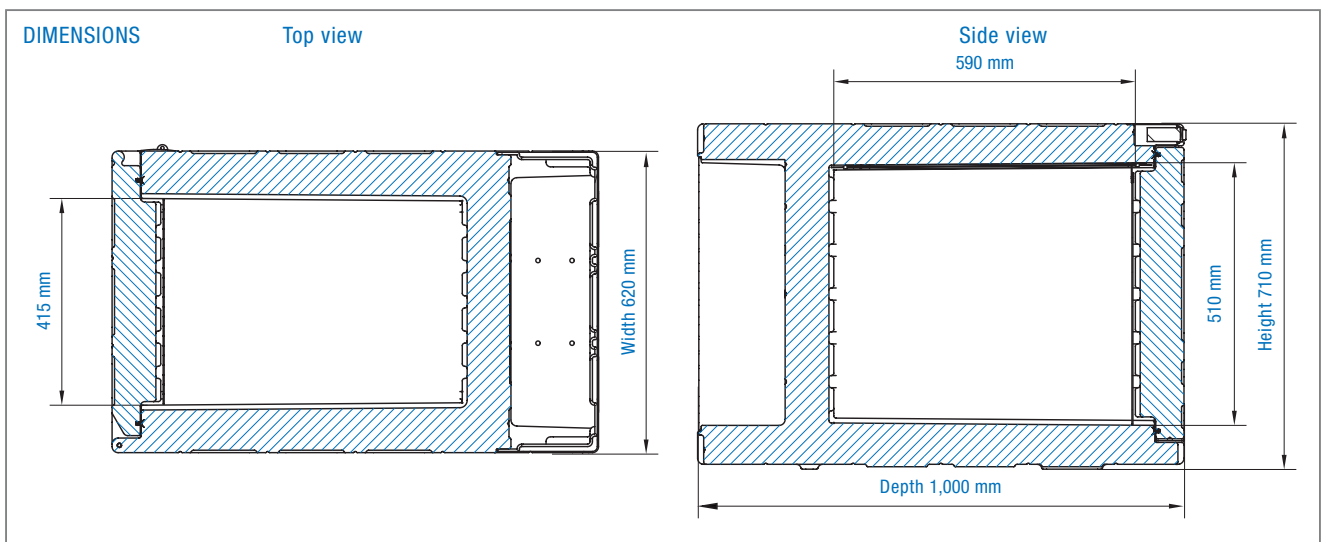



“LIGHT AuO” VERSION\*


140 LITERS

MOBILE REFRIGERATED CONTAINERS

140 LITERS – FRONT LOADER

Technical designation	F0140 NDN	F0140 FDN	F0140 NDH	F0140 FDH
Temperature range	0 °C 	-21 °C 	+30 °C to 0 °C 	+30 °C to -21 °C 
Product code	81 0000 00 0564	81 0000 00 0565	81 0000 00 0563	81 0000 00 0566
Voltage	internal 12 VDC battery 1 x 110 Ah	internal 12 VDC battery 1 x 110 Ah	internal 12 VDC battery 1 x 110 Ah	internal VDC battery 1 x 110 Ah
Battery charger input voltage	15 A 100~240 VAC 50~60 Hz	15 A 100~240 VAC 50~60 Hz	15 A 100~240 VAC 50~60 Hz	15 A 100~240 VAC 50~60 Hz
Max. current draw, direct current	9 A at 12 V	18 A at 12 V	9 A at 12 V	18 A at 12 V
Wall foam insulation	80 - 90 mm PU*	80 - 90 mm PU*	80 - 90 mm PU*	80 - 90 mm PU*
Refrigerant	R134a	R404a	R134a	R404a
Weight	93 kg	96 kg	95 kg	98 kg
External dimensions (W x D x H)	620 x 1,000 x 800 mm	620 x 1,000 x 800 mm	620 x 1,000 x 800 mm	620 x 1,000 x 800 mm



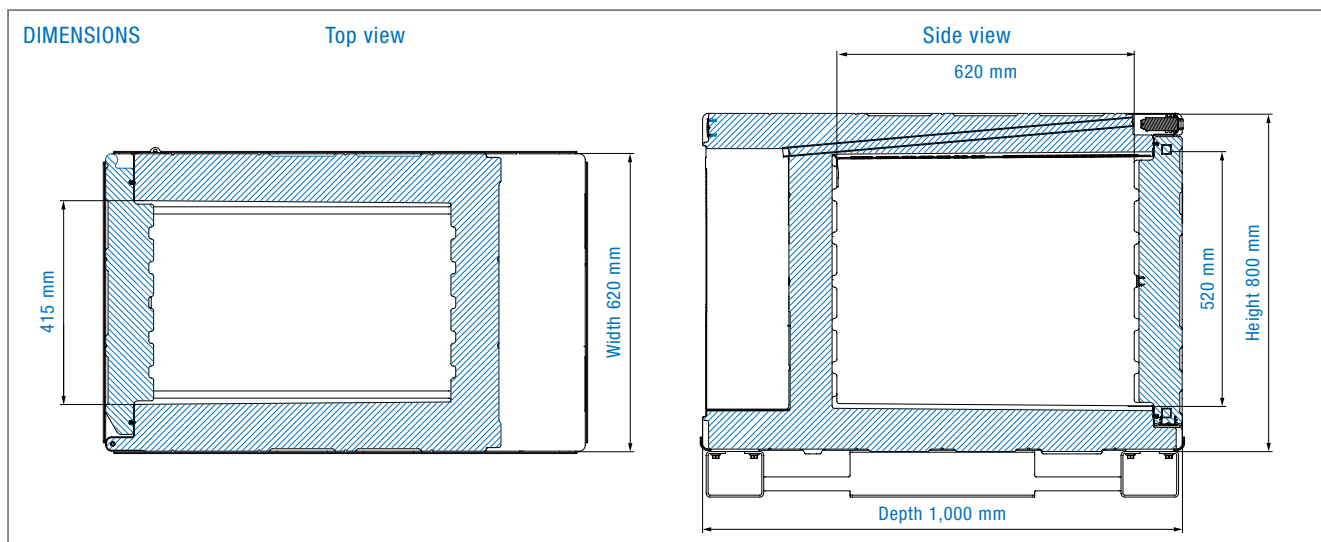


light AuO: Autonomous battery operation up to 24 hours, limited capacity, one battery in the compressor compartment, and an integrated power outlet for charging the battery.  
 \* PU = wall foam insulation with polyurethane rigid foam (K < 0.35 W/(m²K))  
 Accessories depend on the model.






## 330 LITERS MOBILE REFRIGERATED CONTAINERS

### 330 LITERS – FRONT LOADER

Technical designation	F0330 NDN	F0330 FDN	F0330 NDH	F0330 FDH	F0330 XFDN
Temperature range	0 °C 	-21 °C 	+30 °C to 0 °C 	+30 °C to -21 °C 	-35 °C 
Product code	81 0000 00 0497	81 0000 00 0499	81 0000 00 0498	81 0000 00 0500	81 0000 00 0501
Voltage	12 / 24 VDC	12 / 24 VDC	12 / 24 VDC	12 / 24 VDC	12 VDC
Max. current draw, direct current	10 A at 12 V	18 A at 12 V	10 A at 12 V	18 A at 12 V	25 A at 12 V
Wall foam insulation	100 mm PU*	100 mm PU*	100 mm PU*	100 mm PU*	100 mm PU*
Refrigerant	R134a	R134a	R134a	R134a	R404a
Weight	80 kg	83 kg	83 kg	86 kg	90 kg
External dimensions (W x D x H)	1,000 x 1,020 x 910 mm	1,000 x 1,020 x 910 mm	1,000 x 1,020 x 910 mm	1,000 x 1,020 x 910 mm	1,000 x 1,020 x 910 mm

\* PU = wall foam insulation with polyurethane rigid foam ( $K < 0.27 \text{ W/(m}^2\text{K)}$ )  
Standard model without battery packs. Equipped with two DC inputs.  
Accessories depend on the model.

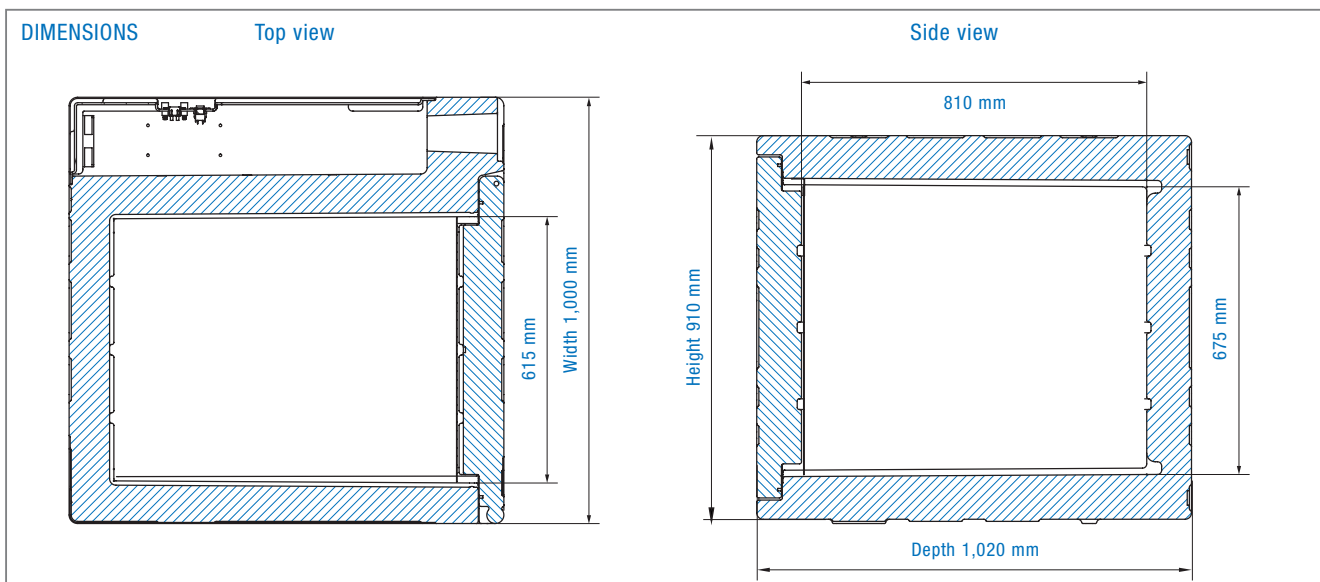



“LIGHT AuO” VERSION\*

330 LITERS

MOBILE REFRIGERATED CONTAINERS


330 LITERS – FRONT LOADER

Technical designation	F0330 NDN	F0330 FDN	F0330 NDH	F0330 FDH	F0330 XFDN
Temperature range	0 °C 	-21 °C 	+30 °C to 0 °C 	+30 °C to -21 °C 	-35 °C 
Product code	81 0000 00 0527	81 0000 00 0525	81 0000 00 0526	81 0000 00 0524	81 0000 00 0523
Voltage	internal 12 VDC battery 1 x 110 Ah	internal 12 VDC battery 1 x 110 Ah	internal 12 VDC battery 1 x 110 Ah	internal 12 VDC battery 1 x 110 Ah	internal 12 VDC battery 1 x 150 Ah
Battery charger input voltage	15 A 100/240 VAC 50/60 Hz	15 A 100/240 VAC 50/60 Hz	15 A 100/240 VAC 50/60 Hz	15 A 100/240 VAC 50/60 Hz	25 A 100/240 VAC 50/60 Hz
Max. current draw, direct current	10 A at 12 V	18 A at 12 V	10 A at 12 V	18 A at 12 V	25 A at 12 V
Wall foam insulation	100 mm PU*	100 mm PU*	100 mm PU*	100 mm PU*	100 mm PU*
Refrigerant	R134a	R134a	R134a	R134a	R404a
Weight	126 kg	129 kg	129 kg	131 kg	150 kg
External dimensions (W x D x H)	1,000 x 1,020 x 1,000 mm	1,000 x 1,020 x 1,000 mm	1,000 x 1,020 x 1,000 mm	1,000 x 1,020 x 1,000 mm	1,000 x 1,020 x 1,000 mm

light AuO: Autonomous battery operation up to 24 hours, limited capacity, one battery in the compressor compartment, and an integrated power outlet for charging the battery.

\* PU = wall foam insulation with polyurethane rigid foam (K < 0.27 W/(m²K))

Accessories depend on the model.

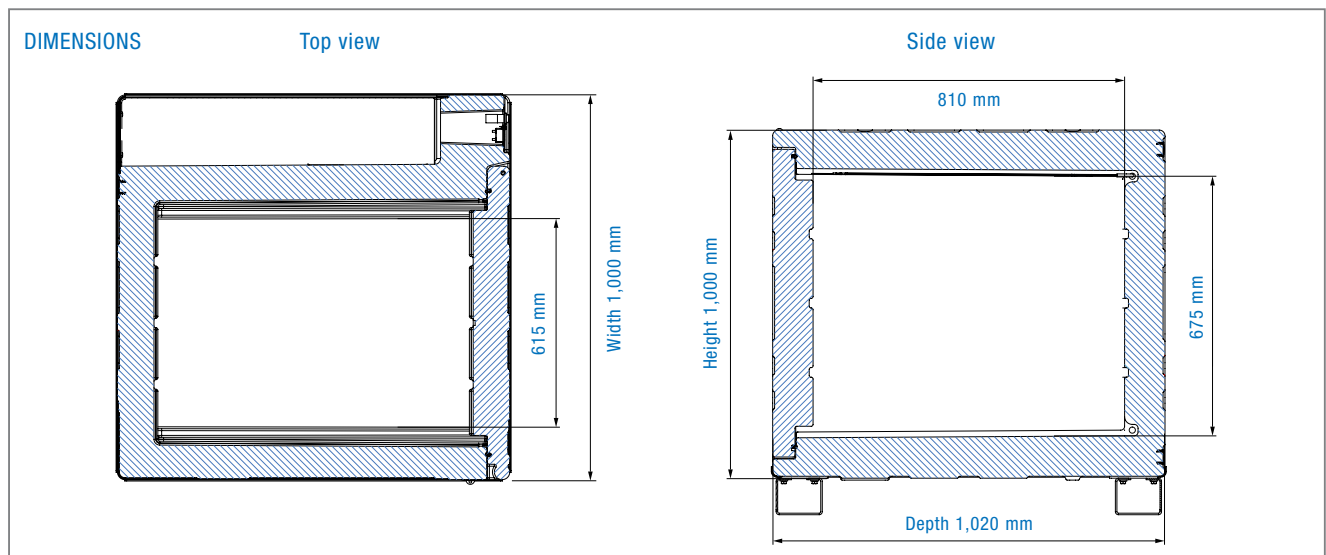



Refrigerated container with metal feet:  
transportable by pallet jack or forklift

## 720 LITERS MOBILE REFRIGERATED CONTAINERS



### 720 LITERS – FRONT LOADER


Technical designation	F0720 NDN	F0720 FDN	F0720 NDH	F0720 FDH
Temperature range	0 °C 	-24 °C 	+30 °C to 0 °C 	+30 °C to -24 °C 
Product code	81 0000 00 0502	81 0000 00 0506	81 0000 00 0504	81 0000 00 0508
Product code 'C-Ready'*	81 0000 00 0503	81 0000 00 0507	81 0000 00 0505	81 0000 00 0509
Voltage	12 / 24 VDC	12 VDC	12 / 24 VDC	12 VDC
Max. current draw, direct current	20 A at 12 V	32 A at 12 V	20 A at 12 V	32 A at 12 V
Wall foam insulation	100 mm PU**	100 mm PU**	100 mm PU**	100 mm PU**
Refrigerant	R134a	R404a	R134a	R404a
Weight	144 kg	150 kg	147 kg	153 kg
External dimensions (W x D x H)	1,100 x 1,400 x 1,100 mm	1,100 x 1,400 x 1,100 mm	1,100 x 1,400 x 1,100 mm	1,100 x 1,400 x 1,100 mm

\*'C-Ready': Model suitable for stacking. Please consult your point of contact.

\*\* PU = wall foam insulation with polyurethane rigid foam (K < 0.28 W/(m²K))

Standard model without battery packs. Equipped with two DC inputs.

Accessories depend on the model.

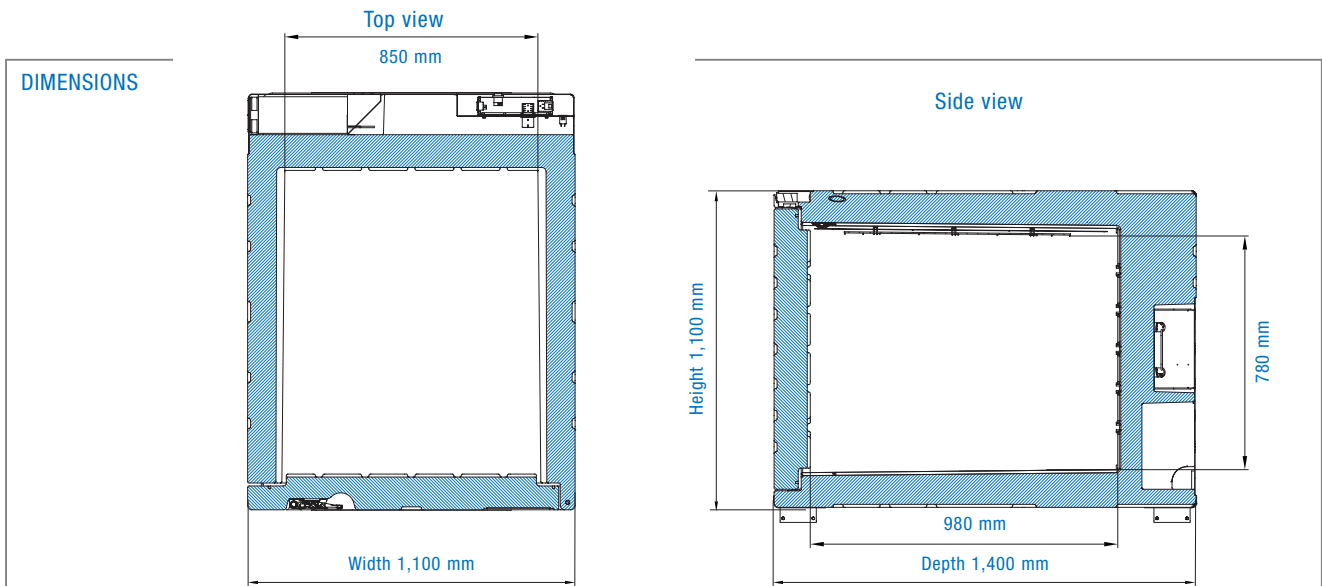



“LIGHT AuO” VERSION\*

720 LITERS

MOBILE REFRIGERATED CONTAINERS




720 LITERS – FRONT LOADER

Technical designation	F0720 NDN	F0720 FDN	F0720 NDH	F0720 FDH
Temperature range	0 °C 	-24 °C 	+30 °C to 0 °C 	+30 °C to -24 °C 
Product code	81 0000 00 0528	81 0000 00 0530	81 0000 00 0529	81 0000 00 0531
Voltage	internal 12 VDC battery 1 x 150 Ah	internal 12 VDC battery 1 x 150 Ah	internal 12 VDC battery 1 x 150 Ah	internal 12 VDC battery 1 x 150 Ah
Battery charger input voltage	25 A 100/240 VAC 50/60 Hz	25 A 100/240 VAC 50/60 Hz	25 A 100/240 VAC 50/60 Hz	25 A 100/240 VAC 50/60 Hz
Max. current draw, direct current	20 A at 12 V	32 A at 12 V	20 A at 12 V	32 A at 12 V
Wall foam insulation	100 mm PU*	100 mm PU*	100 mm PU*	100 mm PU*
Refrigerant	R134a	R404a	R134a	R404a
Weight	191 kg	197 kg	194 kg	200 kg
External dimensions (W x D x H)	1,100 x 1,400 x 1,100 mm	1,100 x 1,400 x 1,100 mm	1,100 x 1,400 x 1,100 mm	1,100 x 1,400 x 1,100 mm

light AuO: Autonomous battery operation up to 24 hours, limited capacity, one battery in the compressor compartment, and an integrated power outlet for charging the battery.

\* PU = wall foam insulation with polyurethane rigid foam (K < 0.28 W/(m²K))

Accessories depend on the model.

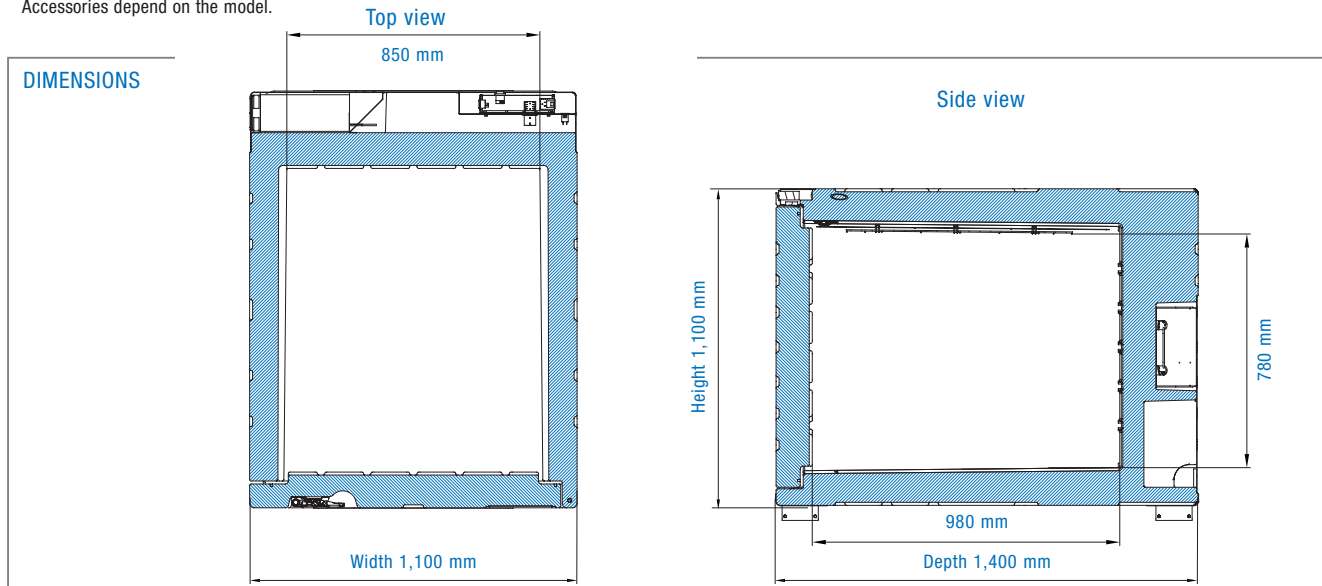





Refrigerated container with metal feet:  
transportable by pallet jack or forklift

## 915 LITERS MOBILE REFRIGERATED CONTAINERS



### 915 LITERS – FRONT LOADER


Technical designation	F0915 NDN	F0915 FDN*	F0915 NDH	F0915 FDH
Temperature range	0 °C 	-21 °C 	+30 °C to 0 ° 	+30 °C to -21 °C 
Product code	81 0000 00 0512	81 0000 00 0514	81 0000 00 0513	81 0000 00 0515
Voltage	12 / 24 VDC	12 VDC	12 / 24 VDC	12 VDC
Max. current draw, direct current	20 A at 12 V	32 A at 12 V	20 A at 12 V	32 A at 12 V
Wall foam insulation	100 mm PU**	100 mm PU**	100 mm PU**	100 mm PU**
Refrigerant	R134a	R404a	R134a	R404a
Weight	166 kg	172 kg	169 kg	175 kg
External dimensions (W x D x H)	1,200 x 1,500 x 1,180 mm	1,200 x 1,500 x 1,180 mm	1,200 x 1,500 x 1,180 mm	1,200 x 1,500 x 1,180 mm

\* F0915 FDN cannot be operated with 24 V. It can only be operated with an additional, external converter that is not included in the product package.

\*\* PU = wall foam insulation with polyurethane rigid foam ( $K < 0.28 \text{ W}/(\text{m}^2\text{K})$ )

Standard model without battery packs. Equipped with two DC inputs.

Accessories depend on the model.

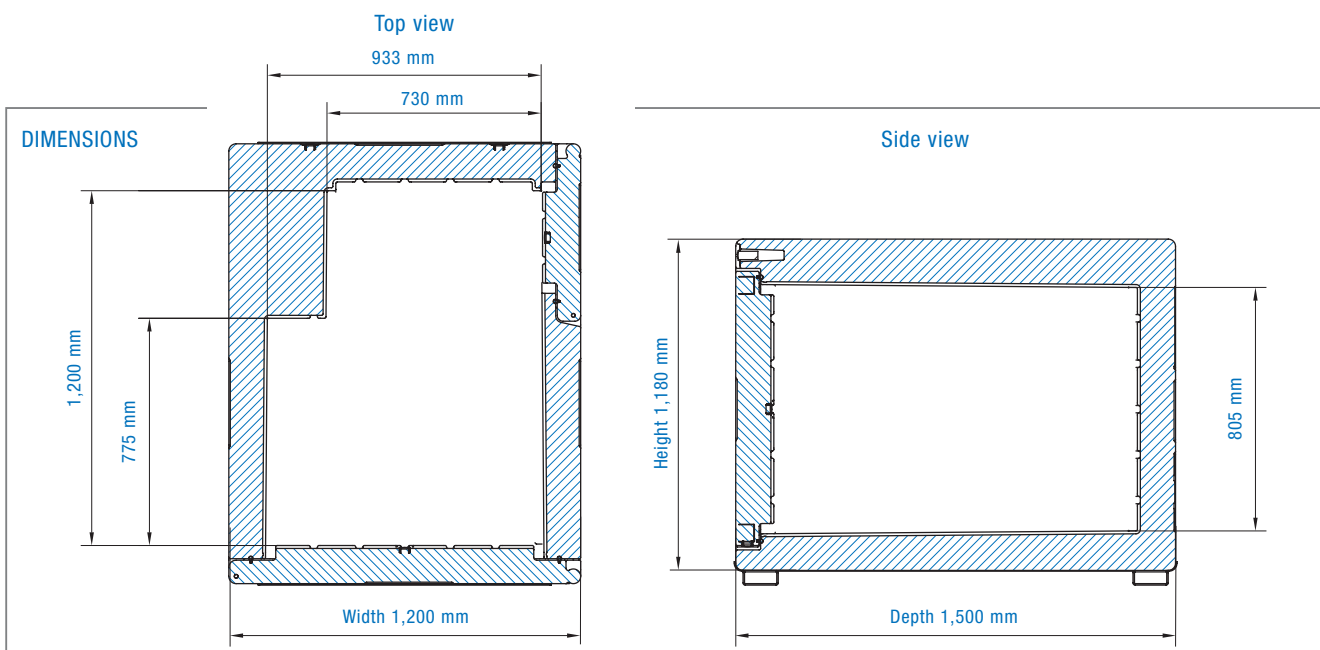






## REFRIGERATED CONTAINERS FOR LONG-DISTANCE TRANSPORT




## 760 LITERS MOBILE REFRIGERATED CONTAINERS



### 760 LITERS – FRONT LOADER

Technical designation	F0760 NDN	F0760 FDN	F0760 NDH
Temperature range	0 °C 	-20 °C 	+30 °C to 0 °C 
Product code	81 0000 00 0510	81 0000 00 0532	81 0000 00 0511
Voltage	12 / 24 VDC	12 VDC	12 / 24 VDC
Max. current draw, direct current	18 A at 12 V	32 A at 12 V	18 A at 12 V
Wall foam insulation	85, 90, 105 mm PU*	85, 90, 105 mm PU*	85, 90, 105 mm PU*
Refrigerant	R134a	R404a	R134a
Weight	137 kg	180 kg	178 kg
External dimensions (W x D x H)	800 x 1,200 x 1,875 mm	800 x 1,200 x 1,875 mm	800 x 1,200 x 1,875 mm

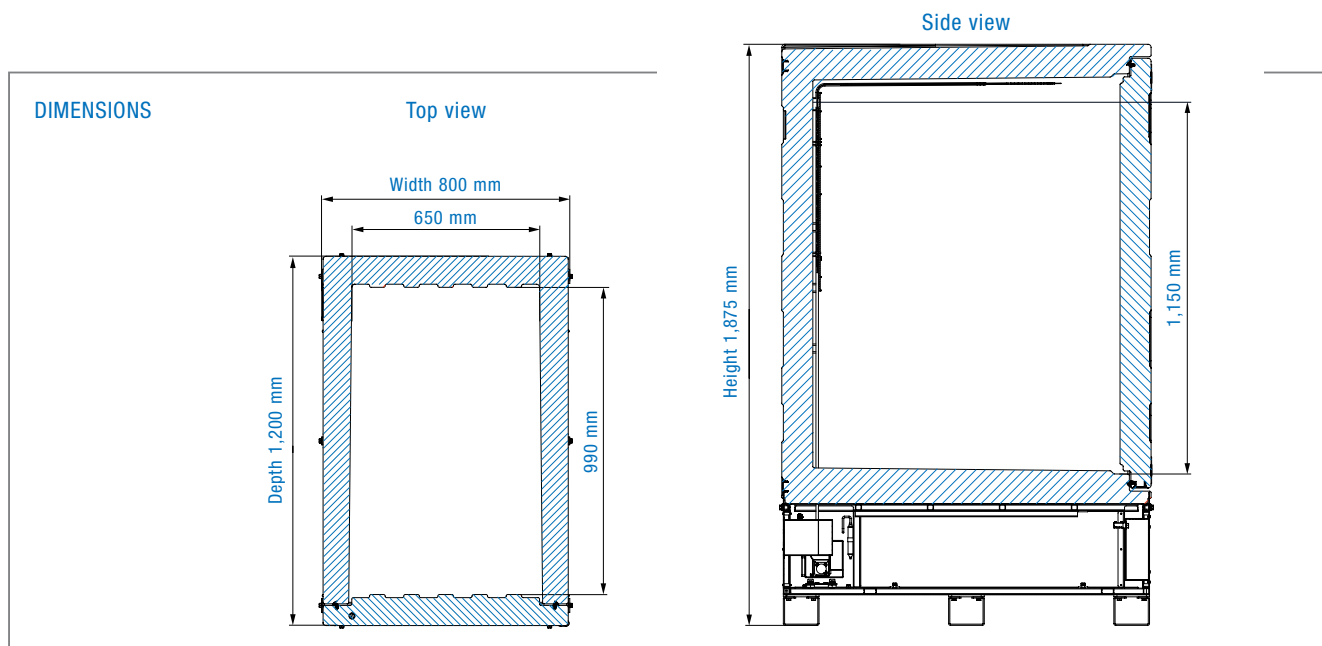

\* PU = wall foam insulation with polyurethane rigid foam ( $K < 0.32 \text{ W/(m}^2\text{K)}$ )  
Accessories on request. Please consult your point of contact.




# 1,340 LITERS MOBILE REFRIGERATED CONTAINERS



## 1,340 LITERS – FRONT LOADER

Technical designation	F1340 NDN	F1340 NDH
Temperature range	0 °C 	+30 °C to 0 °C 
Product code	81 0000 00 0521	81 0000 00 0520
Voltage	12 VDC	12 VDC
Max. current draw, direct current	18 A at 12 V	18 A at 12 V
Wall foam insulation	85, 90, 105 mm PU*	85, 90, 105 mm PU*
Refrigerant	R404a	R404a
Weight	220 kg	225 kg
External dimensions (W x D x H)	1,000 x 1,200 x 2,275 mm	1,000 x 1,200 x 2,275 mm

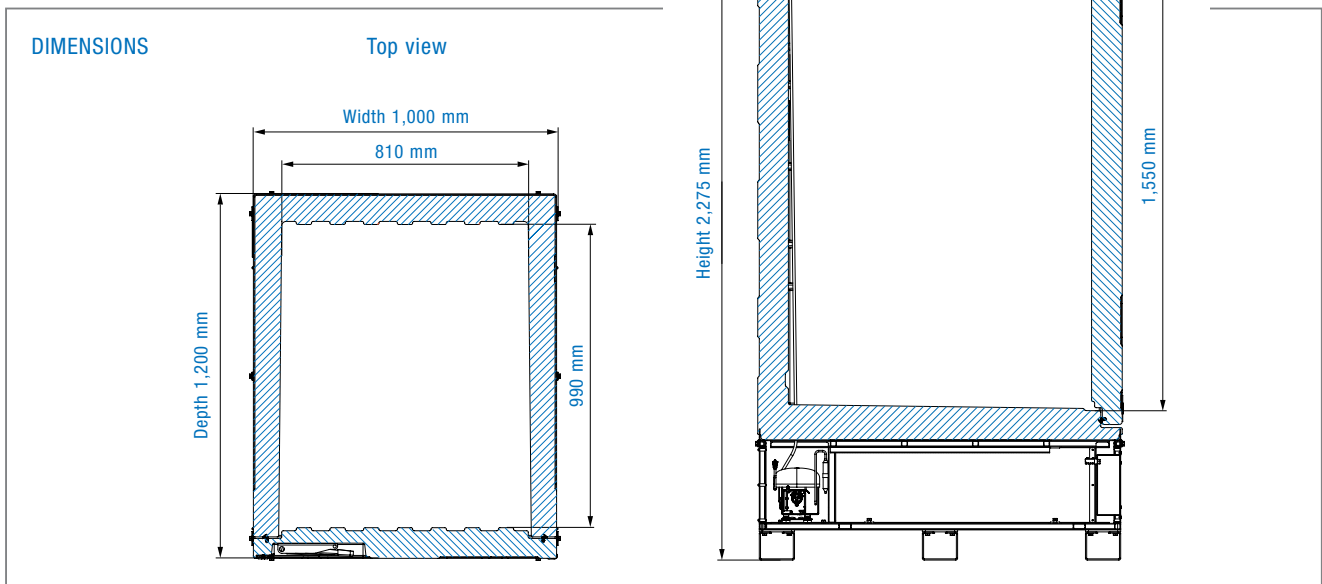

\* PU = wall foam insulation with polyurethane rigid foam ( $K < 0.31 \text{ W/(m}^2\text{K)}$ )  
Accessories on request. Please consult your point of contact.




# 1,640 LITERS MOBILE REFRIGERATED CONTAINERS



## 1,640 LITERS – FRONT LOADER

Technical designation	F1640 NDN	F1640 NDH
Temperature range	0 °C 	+30 °C to 0 °C 
Product code	81 0000 00 0516	81 0000 00 0517
Voltage	12 VDC	12 VDC
Max. current draw, direct current	32 A at 12 V	32 A at 12 V
Wall foam insulation	85, 90, 105 mm PU*	85, 90, 105 mm PU*
Refrigerant	R404a	R404a
Weight	255 kg	260 kg
External dimensions (W x D x H)	1,000 x 1,430 x 2,275 mm	1,000 x 1,430 x 2,275 mm

\* PU = wall foam insulation with polyurethane rigid foam ( $K < 0.36 \text{ W/(m}^2\text{K)}$ )  
Accessories on request. Please consult your point of contact.

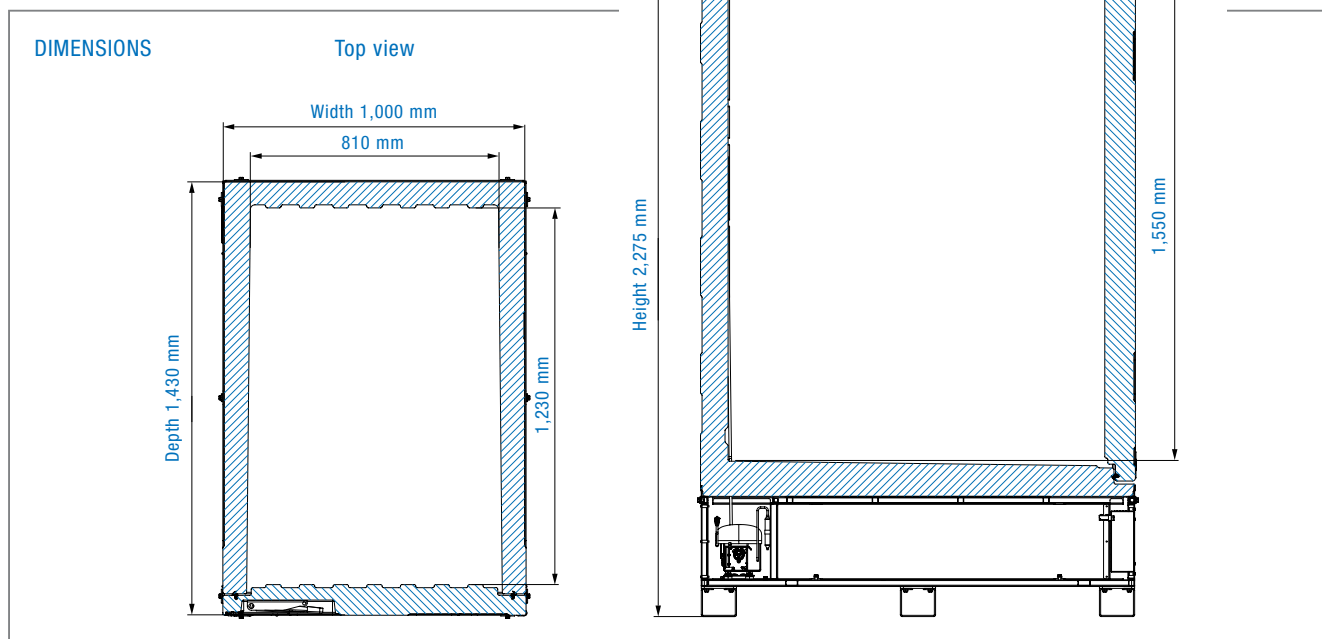


## ACCESSORIES

### MOBILE REFRIGERATED CONTAINERS


#### RACKS:

- Available for F0140, F0330 and F0720
- Load up to 35 kg



#### RACK KIT:

- Available for F0915



#### STRIP CURTAIN:

Helps to maintain the temperature in the container when the door is open.

- Available for F0140 and F0915 (all models) and F0330 NDN
- Included in the product package of F0330 FDN and F0720 (all models)
- Included with the main door of F0915 NDN and F0915 FDN



#### METAL FEET FOR PALLET TRANSPORT:

- Available for F0330
- Included in the product package of F0720 and F0915



#### METAL TROLLEY WITH CASTORS:

- Available for F0140 and F0330



#### CARGO SECURING SET:

- Available for F0140 and F0330

#### COMBO UNIT CONNECTOR:

For fastening two containers together.

- Available for F0330



Accessories	Product code	Model
Fixing kit	81 0000 00 0256	T0022
Fixing kit	81 0000 00 0257	T0032
Internal fan kit	81 0000 00 3353	T0022, T0032
Internal fan kit	81 0000 00 3355	T0056, T0082
Internal fan kit	81 0000 00 0545	F0140
Internal fan kit	81 0000 00 0546	F0720, F0915
Red/yellow connector interface	81 0000 00 0540	T0022, T0032
DC power lead, 5 metres	81 0000 00 0541	T0022, T0032
Bluetooth HACCP EVCO interface	81 0000 00 0522	all models
Protective cover for controller	81 0000 00 0548	T0022, T0032, T0056, T0082
Protective cover for controller	81 0000 00 0549	F0140
Protective cover for controller	81 0000 00 0550	F0330
Protective cover for controller	81 0000 00 0551	F0720
Protective cover for controller	81 0000 00 0552	F0915
Wire shelf (stainless steel)	81 0000 00 0535	F0140
Wire shelf (stainless steel)	81 0000 00 0536	F0330
Wire shelf (stainless steel)	81 0000 00 0538	F0720
Wire shelf (stainless steel)	81 0000 00 0537	F0915
Trolley	81 0000 00 0239	F0140
Trolley	81 0000 00 0241	F0330
Tie down kit (in 2 parts)	81 0000 00 0253	F0140, F0330
Tie down kit (in 2 parts) with pallet base removed	81 0000 00 0543	F0720
Handle joining kit (for combo units)	81 0000 00 3395	F0140, F0330
Plastic strip curtain kit	81 0000 00 0319	F0140
Plastic strip curtain kit	81 0000 00 0320	F0330
Side door plastic strip curtain kit	81 0000 00 0338	F0915
Pallet base	81 0000 00 0243	F0330
Special "Combo" connection kit	81 0000 00 0544	F0720
Upright kit for shelves	81 0000 00 0250	F0915
Shelf support kit	81 0000 00 0255	F0915

AC / DC power supply, 150 W	81 0000 00 0518	T0022 FDN, T0022 FDH, T0032 FDN, T0032 FDH, T0056 FDN, T0056 FDH, T0082 FDN, T0082 FDH, F0140 NDN, F0140 NDH, F0330 NDN, F0330 NDH
AC / DC power supply, 300 W	81 0000 00 0519	T0082 XFDN, F0140 FDN, F0140 FDH, F0330 FDN, F0330 FDH, F0330 XFDN, F0720 NDN, F0720 NDH, F0760 NDN, F0760 NDH, F0915 NDN, F0915 NDH
AC / DC power supply, 600 W	81 0000 00 0533	F0720 FDN, F0720 FDH, F0760 FDN, F0915 FDN, F0915 FDH, F1340 NDN, F1340 NDH, F1640 NDN, F1640 NDH

## SUITABILITY FOR THE FOLLOWING VEHICLES

### MOBILE REFRIGERATED CONTAINERS

MODEL	F0330	F0720	F0915 (including pallet)
Citroën Nemo	✓	—	—
Citroën Berlingo L1	✓	✓	—
Citroën Berlingo L2	✓	✓	—
Citroën Jumpy	✓	✓	✓*
Fiat Fiorino	✓	—	—
Fiat Doblò (old model)	✓	✓	—
Fiat Doblò (new model)	✓	✓	✓
Fiat Scudo	✓	✓	✓
Ford Transit Connect (short wheelbase)	✓	✓	—
Ford Transit Connect (long wheelbase)	✓	✓	✓*
Mercedes Citan Compact	✓	—	—
Mercedes Citan Long	✓	✓	—
Mercedes Citan Extra Long	✓	✓	—
Mercedes Vito	✓	✓	✓
Nissan NV 2000	✓	✓	—
Opel Combo (from model year 2012)	✓	✓	✓
Opel Vivaro	✓	✓	✓
Peugeot Bipper	✓	—	—
Peugeot Partner L1	✓	✓	—
Peugeot Partner L2	✓	✓	—
Peugeot Expert	✓	✓	✓
Renault Kangoo Compact	✓	—	—
Renault Kangoo Express	✓	✓	—
Renault Kangoo Maxi	✓	✓	—
Toyota HiAce	✓	✓	✓
Volkswagen Caddy	✓	—	—

\* Only without pallet



## CERTIFIED QUALITY AND SAFETY

### QUALITY AND SAFETY:

All devices comply with the following standards:

- ECE Regulation 10.04
- European Directive 2002/95/EC (RoHS)
- European Directive 2002/96/EC (WEEE)
- Commission Directive 2002/72/EC (relating to plastic materials and articles intended to come into contact with foodstuffs)
- Regulation (EC) No 853/2004 on the hygiene of foodstuffs (HACCP)



Eberspächer Climate Control Systems GmbH & Co. KG  
Eberspächerstraße 24  
73730 Esslingen  
GERMANY  
Phone: +49 711 939-00  
Fax: +49 711 939-0634  
info@eberspaecher.com  
www.eberspaecher.com

